


### High abrasion-resistant polypropylene spiral binding, narrow pitch

#### SPS

SPS spiral binding is especially suitable wherever high abrasion resistance and much larger cable diameters are needed, for example in the petrochemical industry and in plant construction.


#### Features and benefits

- Heavy-walled and very robust
- Excellent protection from mechanical stress
- Very high abrasion resistance
- Very good resistance to oils
- Available in diameters up to 50 mm
- Ideal for larger cable bundles

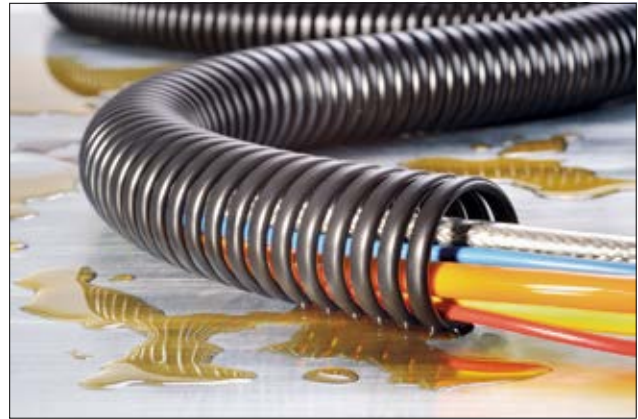

Spiral binding SPS is very robust and provides good protection against oil.

<b>MATERIAL</b>	Polypropylene (PP)
<b>Operating Temperature</b>	-30 °C to +100 °C
<b>Flammability</b>	UL94 HB

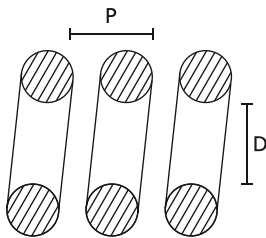

SPS spiral binding (narrow pitch)

TYPE	Ø (D)	Pitch (P)	Bundle Ø max.	Length (L)	Colour	Article-No.
SPS10	10.0	5.0	14	1.0 m	Black (BK)	162-10100
SPS15	15.0	5.0	20	1.0 m	Black (BK)	162-10150
SPS20	20.0	5.5	25	1.0 m	Black (BK)	162-10200
SPS25	25.0	6.0	30	1.0 m	Black (BK)	162-10250
SPS30	30.0	6.5	37	1.0 m	Black (BK)	162-10300
SPS35	35.0	6.5	42	1.0 m	Black (BK)	162-10350
SPS40	40.0	7.0	48	1.0 m	Black (BK)	162-10400
SPS50	50.0	8.0	59	1.0 m	Black (BK)	162-10500

All dimensions in mm. Subject to technical changes.  
Minimum Order Quantity (MOQ) may differ from package content.